

# Level Measurement

## Continuous level measurement - Radar transmitters

### SITRANS LR200

#### Overview



SITRANS LR200 is a 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).

#### Benefits

- Graphical local user interface (LUI) makes operation simple with plug-and-play setup using the intuitive Quick Start Wizard
- LUI displays echo profiles for diagnostic support
- Communication using HART® or PROFIBUS PA
- Process Intelligence signal processing for improved measurement reliability and Auto False-Echo Suppression of fixed obstructions
- Programming using infrared Intrinsically Safe handheld programmer or SIMATIC PDM

#### Application

SITRANS LR200's unique design allows safe and simple programming using the Intrinsically Safe handheld programmer without having to open the instrument's lid. It also features a built-in alphanumeric display in four languages.

The SITRANS LR200 has a standard Uni-Construction polypropylene rod antenna that offers excellent chemical resistance and is hermetically sealed. The Uni-Construction antenna features an internal, integrated shield that eliminates vessel nozzle interference.

Start-up is easy with as few as two parameters for basic operation. Installation is simplified as the electronics are mounted on a rotating head that swivels, allowing the instrument to line up with conduit or wiring connections or simply to adjust the position for easy viewing. SITRANS LR200 features patented Process Intelligence signal-processing technology for superior reliability.

- Key Applications: liquid bulk storage tanks, process vessels with agitators, vaporous liquids, high temperatures, asphalt, digesters


#### Configuration

##### Installation


min. 300 mm (1 ft) for every 3 m (10 ft) of vessel wall.

##### Note:


- Beam angle is the width of the cone where the energy density is half of the peak energy density.
- The peak energy density is directly in front of and in line with the rod antenna.
- There is a signal transmitted outside of the beam angle; therefore false targets may be detected.

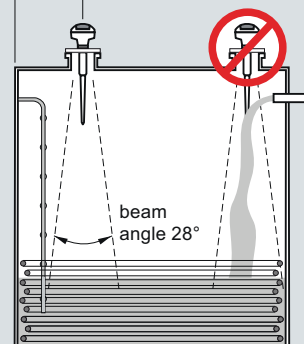


##### Mounting unit on vessel

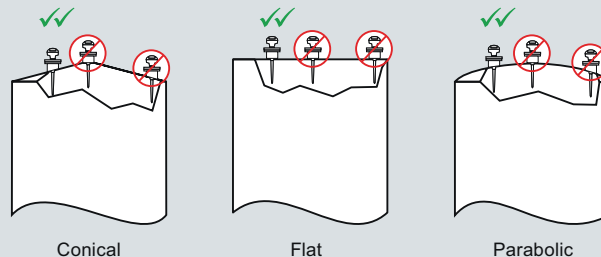

##### Mounting unit on stilling well

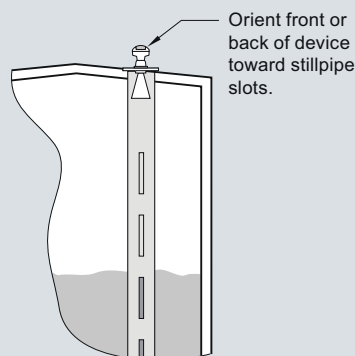

##### Mounting on a nozzle

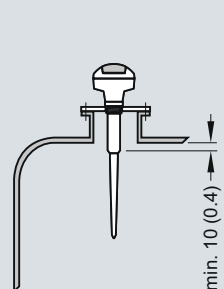

SITRANS LR200 installation, dimensions in mm (inch)

# Level Measurement

## Continuous level measurement - Radar transmitters

SITRANS LR200

### Technical specifications

<b>Mode of operation</b>		Process connections	
Measuring principle	Radar level measurement	• Process connection	1½" NPT [(Taper), ANSI/ASME B1.20.1] R 1½" [(BSPT), EN 10226], or G 1½" [(BSPP), EN ISO 228-1] (polypropylene rod antenna)
Frequency	5.8 GHz (North America 6.3 GHz)	• Flange connection	Refer to SITRANS LR200 Antennas for more connections
Measuring range	0.3 ... 20 m (1.0 ... 65 ft)	<b>Power supply</b>	
<b>Output</b>		4 ... 20 mA/HART	
Analog output	4 ... 20 mA	• General Purpose, Non-incendive, Intrinsically Safe	Nominal 24 V DC (max. 30 V DC) with max. 550 Ω
Accuracy	± 0.02 mA	• Flame proof, Increased safety, Explosion proof	Nominal 24 V DC (max. 30 V DC) with max. 250 Ω
Span	Proportional or inversely proportional	PROFIBUS PA	10.5 mA per IEC 61158-2
Communications	HART® Optional: PROFIBUS PA (Profile 3.0, Class B)	<b>Certificates and approvals</b>	
Fail-safe	Programmable as high, low or hold (Loss of Echo)	General	CSA <sub>US/C</sub> , CE, FM, C-TICK
<b>Performance (according to reference conditions IEC60770-1)</b>		Marine	Lloyd's Register of Shipping ABS Type Approval
From end of antenna to 600 mm:	40 mm (1.57")	Radio	FCC, Industry Canada and European (R&TTE), C-TICK
Remainder of range:	10 mm (0.4") or 0.1 % of span (whichever is greater)	Hazardous	
<b>Rated operating conditions</b>		• Flame proof (Europe)	ATEX II 1/2 G EEx dmia IIC T4
Installation conditions		• Increased safety (Europe)	ATEX II 1/2 G EEx emia IIC T4
• Location	Indoor/outdoor	• Explosion proof (USA/Canada)	CSA/FM (barrier not required) T4, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III
Ambient conditions (enclosure)		• Non-incendive (USA)	FM (barrier not required) T5, Class I, Div. 2, Groups A, B, C, D
• Ambient temperature	-40 ... +80 °C (-40 to +176 °F)	• Intrinsically Safe (Europe)	ATEX II 1G EEx ia IIC T4
• Installation category	I	• Intrinsically Safe (USA/Canada)	CSA/FM (barrier required) T4, Class I, Div. 1, Groups A, B, C, D; Class II, Div. 1, Groups E, F, G; Class III
• Pollution degree	4	• Intrinsically Safe (Australia)	ANZEX Ex ia IIC T4 [T <sub>a</sub> = -40 ... +80 °C (-40 ... +176 °F)] IP67
<b>Medium conditions</b>		• Intrinsically Safe (International)	IECEx TSA 04.0020X T4
Dielectric constant ε <sub>r</sub>	ε <sub>r</sub> > 1.6 (for ε <sub>r</sub> < 3, use waveguide antenna or stillpipe)	Brazil - INMETRO	BR-Ex ia IIC T4
Vessel temperature and pressure	Varies with connection type; see Pressure/Temperature curves for more information	<b>Programming</b>	
<b>Design</b>		Intrinsically Safe Siemens handheld programmer	Infrared receiver
Enclosure		• Approvals for handheld programmer	IS model: ATEX II 1GD Ex ia IIC T4 Ga Ex iaD 20 T135°C T <sub>a</sub> = -20 ... +50 °C CSA/FM Class I, II, and III, Div. 1, Groups A, B, C, D, E, F, G, T6 T <sub>a</sub> = +50 °C
• Material	Aluminium, polyester powder coated	Handheld communicator	HART communicator 375
• Cable inlet	2 x M20x1.5 or 2 x ½" NPT with adapter	PC	SIMATIC PDM AMS
Degree of protection	Type 4X/NEMA 4X, Type 6/ NEMA 6, IP67, IP68	Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages
Weight	< 2 kg (4.4 lbs) (polypropylene rod antenna)		
Display (local)	Multi-segment alphanumeric liquid crystal with bar graph (representing level) available in four languages		
Antenna			
• Material	Polypropylene rod, hermetically sealed construction, optional PTFE		
• Dimensions	Standard 100 mm (4") shield for maximum 100 mm (4") nozzle, or optional 250 mm (10") long shield		
• Optional rods, horn and waveguides	Refer to SITRANS LR200 Antennas for optional rods, horns and waveguides		

HART® is a registered trademark of the Hart Communications Foundation.

# Level Measurement

## Continuous level measurement - Radar transmitters

### SITRANS LR200

Selection and Ordering data	Order No.
<b>SITRANS LR200, Uni-Construction polypropylene rod antenna version</b> 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft). Max. 3 bar g (43.5 psi g) pressure and +80 °C (+176 °F)	C) <b>7ML5422-0</b>
<b>Enclosure/Cable inlet</b> Aluminum, Epoxy painted 2 x 1/2" NPT, Siemens LUI interface 2 x M20x1.5, Siemens LUI interface	2 3
<b>Polypropylene antenna type - (Max. 3 Bar pressure and +80 °C)</b> 1/2" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 100 mm shield R 1/2" [(BSPT), EN 10226], c/w integral 100 mm shield G 1/2" [(BSPP), EN ISO 228-1], c/w integral 100 mm shield 1/2" NPT [(Taper), ANSI/ASME B1.20.1], c/w integral 250 mm shield R 1/2" [(BSPT), EN 10226], c/w integral 250 mm shield G 1/2" [(BSPP), EN ISO 228-1], c/w integral 250 mm shield	A B C D E F
<b>Approvals</b> General Purpose, CE <sup>1)</sup> General Purpose, CSA <sub>USC</sub> , FM, for North America only <sup>2)</sup> CSA Class I and II, Div. I, Groups A, B, C, D, G, 6.3 GHz, for North America only, Intrinsically Safe with suitable barrier <sup>2)</sup> FM, Class I and II, Div. I, Groups A, B, C, D, E, F, G, for North America only, Intrinsically Safe with suitable barrier <sup>2)</sup> ATEX II 1G EEx ja IIC T4, Intrinsically Safe with suitable barrier <sup>1)</sup> FM, Class I, Div. 2, Groups A, B, C, D, for North America only (no barrier required) <sup>2) 3)</sup> ATEX II 1/2 G EEx emia IIC T4 (no barrier required) <sup>1) 4) 5)</sup> ATEX II 1/2 G EEx dmia IIC T4 (no barrier required) <sup>1) 5)</sup> CSA/FM Class I, II and III, Div. 1, Groups A, B, C, D, E, F, G (no barrier required) <sup>2) 3) 5)</sup>	A B C D E F G H J
<b>Communication/Output</b> PROFIBUS PA 4 ... 20 mA, HART®, startup at <3.6 mA	2 3

1) Includes European Radio approval (R&TTE), 5.8 GHz, C-TICK

2) Includes Radio approval FCC, 6.3 GHz

3) Available with enclosure option 2 only

4) Available with enclosure option 3 only

5) Available with communication option 1 and 3 only

C) Subject to export regulations AL: N, ECCN: EAR99

Selection and Ordering data	Order code
<b>Further designs</b> Please add "-Z" to Order No. and specify Order code(s). Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters); specify in plain text Test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000 Namur NE43 compliant, device preset to failsafe <3.6 mA <sup>5)</sup>	Y15 C11 N07
<b>Operating Instructions for HART/mA device</b> English German Note: The Operating Instructions should be ordered as a separate line item on the order. Multi-language Quick Start manual This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	Order No. C) <b>7ML1998-5JP02</b> C) <b>7ML1998-5JP32</b> C) <b>7ML1998-5XC82</b>
<b>Operating Instructions for PROFIBUS PA device</b> English German Note: The Operating Instructions should be ordered as a separate line item on the order. Multi-language Quick Start manual This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	C) <b>7ML1998-5JR01</b> C) <b>7ML1998-5JR31</b> C) <b>7ML1998-5XD81</b>
<b>Accessories</b> Handheld programmer, Intrinsically safe, EEx ia HART modem/RS-232 (for use with a PC and SIMATIC PDM) HART modem/USB (for use with a PC and SIMATIC PDM) One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART <sup>1)</sup> One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA <sup>6)</sup> SITRANS RD100 Remote display - see Chapter 8 SITRANS RD200 Remote display - see Chapter 8 SITRANS RD500 Remote display - see Chapter 8	C) <b>7ML1930-1BK</b> D) <b>7MF4997-1DA</b> D) <b>7MF4997-1DB</b> <b>7ML1930-1AP</b> <b>7ML1930-1AQ</b>
1) Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended. C) Subject to export regulations AL: N, ECCN: EAR99 D) Subject to export regulations AL: N, ECCN: EAR99H	

# Level Measurement

## Continuous level measurement - Radar transmitters

SITRANS LR200

Selection and Ordering data	Order No.	Selection and Ordering data	Order code
<b>SITRANS LR200, Flange Adapter, Sanitary Version</b> 2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).	C) <b>7ML5424-</b>	<b>Further designs</b>	
<b>Antenna material (uses antenna adapter)</b> PTFE, one piece rod antenna UHMW-PE, one piece rod antenna	0 1	Please add "-Z" to Order No. and specify Order code(s).	
<b>Process connection</b> Sanitary fitting clamp	A	Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters); specify in plain text	<b>Y15</b>
<b>Configuration/Connection size</b> 2" connection, rod antenna only 3" connection, rod antenna only 4" connection, rod antenna only	A B C	Test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000	<b>C11</b>
<b>Antenna extension</b> No extension	0	Inspection Certificate Type 3.1 per EN 10204	<b>C12</b>
<b>Mounting Clamp</b> No mounting clamp Mounting clamp included, not available with Pressure rating option 0	0 1	Namur NE43 compliant, device preset to failsafe <3.6 mA <sup>5)</sup>	<b>N07</b>
<b>Enclosure/Cable inlet</b> Aluminum, Epoxy painted 2 x 1/2" NPT, Siemens LUI interface C) 2 x M20x1.5, Siemens LUI interface C)	2 3	<b>Operating Instructions for HART/mA device</b>	Order No.
<b>Communication/Output</b> PROFIBUS PA 4 ... 20 mA, HART®, startup at <3.6 mA	B C	English C) <b>7ML1998-5JP02</b> German C) <b>7ML1998-5JP32</b>	
<b>Approvals</b> General Purpose, CE <sup>1)</sup> General Purpose, CSA <sub>USC</sub> , FM, for North America only <sup>2)</sup> C) CSA Class I and II, Div. I, Groups A, B, C, D, G, for C) North America only, Intrinsically Safe with suitable barrier <sup>2)</sup> FM, Class I and II, Div. I, Groups A, B, C, D, E, F, G, C) for North America only, Intrinsically Safe with suitable barrier <sup>2)</sup> ATEX II 1G EEx ia IIC T4, Intrinsically Safe with suitable barrier <sup>1)</sup> FM, Class I, Div. 2, Groups A, B, C, D, FCC C) 6.3 GHz, for North America only (no barrier required) <sup>3)</sup> ATEX II 1/2 G EEx emia IIC T4 (no barrier required) <sup>1) 4) 5)</sup> ATEX II 1/2 G EEx dmia IIC T4 (no barrier required) <sup>1) 5)</sup> CSA/FM Class I, II and III, Div. 1, Groups A, B, C, C) D, E, F, G (no barrier required) <sup>2) 3) 5)</sup>	A B C D E F G H J	Note: The Operating Instructions should be ordered as a separate line item on the order.	C) <b>7ML1998-5XC81</b>
<b>Pressure rating</b> Rating per Pressure/Temperature curves in Manual 0.5 bar g (7.25 psi g) maximum	0 1	<b>Operating Instructions for PROFIBUS PA device</b>	
<sup>1)</sup> Includes European Radio approval (R&TTE), 5.8 GHz, C-TICK <sup>2)</sup> Includes Radio approval FCC, 6.3 GHz <sup>3)</sup> Available with enclosure option 2 only <sup>4)</sup> Available with enclosure option 3 only <sup>5)</sup> Available with communication option A and C only		English C) <b>7ML1998-5JR02</b> German C) <b>7ML1998-5JR32</b>	
C) Subject to export regulations AL: N, ECCN: EAR99		Note: The Operating Instructions should be ordered as a separate line item on the order.	C) <b>7ML1998-5XD81</b>
		<b>Accessories</b>	
		Handheld programmer, Intrinsically safe, EEx ia C) <b>7ML1930-1BK</b>	
		HART modem/RS-232 (for use with a PC and SIMATIC PDM) D) <b>7MF4997-1DA</b>	
		HART modem/USB (for use with a PC and SIMATIC PDM) D) <b>7MF4997-1DB</b>	
		One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART <sup>1)</sup>	<b>7ML1930-1AP</b>
		One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA <sup>6)</sup>	<b>7ML1930-1AQ</b>
		SITRANS RD100 Remote display - see Chapter 8	
		SITRANS RD200 Remote display - see Chapter 8	
		SITRANS RD500 Remote display - see Chapter 8	
		<b>Sanitary fitting clamps</b>	
		2", 304 stainless steel	<b>7ML1830-1HD</b>
		3", 304 stainless steel	<b>7ML1830-1HE</b>
		4", 304 stainless steel	<b>7ML1830-1HF</b>
		<sup>1)</sup> Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.	
		C) Subject to export regulations AL: N, ECCN: EAR99	
		D) Subject to export regulations AL: N, ECCN: EAR99H	

# Level Measurement

## Continuous level measurement - Radar transmitters

### SITRANS LR200

Selection and Ordering data	Order No.
<b>SITRANS LR200, Flange Adapter/PTFE Rod Antenna Version</b>	C) 7 ML 5 4 2 3 -
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
<b>Antenna material (uses antenna adapter)</b> PTFE, uses antenna adapter and additional process connection below	1
<b>Process connection (refer to Pressure/Temperature curves in Operating Instructions)</b> Flanges (316L stainless steel) DN 50 PN 16, Type A, flat faced DN 80 PN 16, Type A, flat faced DN 100 PN 16, Type A, flat faced DN 150 PN 16, Type A, flat faced  2" ASME 150 lb, flat faced 3" ASME 150 lb, flat faced 4" ASME 150 lb, flat faced 6" ASME 150 lb, flat faced  DN 50 PN 40, flat faced DN 80 PN 40, flat faced DN 100 PN 40, flat faced DN 150 PN 40, flat faced  2" ASME 300 lb, flat faced, available with Pressure rating option 1 only 3" ASME 300 lb, flat faced 4" ASME 300 lb, flat faced 6" ASME 300 lb, flat faced  JIS DN 50 10K JIS DN 80 10K JIS DN 100 10K JIS DN 150 10K (Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)  Threaded connection (316L stainless steel) 1½" NPT [(Taper), ANSI/ASME B1.20.1] 2" NPT [(Taper), ANSI/ASME B1.20.1] R 1½" [(BSPT), EN 10226]  R 2" [(BSPT), EN 10226] G 1½" [(BSPP), EN ISO 228-1] G 2" [(BSPP), EN ISO 228-1]	AA BA CA DA  FB GB HB JB  AC BC CC DC FD  GD HD JD  AE BE CE DE  LA MA LC  MC LE ME
<b>Antenna extensions or Inactive shield length</b> No antenna extension 50 mm (2") extension, PTFE 100 mm (4") extension, PTFE  100 mm (4") extension, 316L stainless steel shield <sup>1)</sup> 150 mm (6") extension, 316L stainless steel shield <sup>1)</sup> 200 mm (8") extension, 316L stainless steel shield <sup>1)</sup>  250 mm (10") extension, 316L stainless steel shield <sup>1)</sup> Custom inactive shield length 101 mm ... 1000 mm (in 1 mm increments) <u>Add order code Y01 and plain text: "Inactive shield length .... mm"<sup>1)</sup></u>	0 1 2 3 4 5 6 7
<b>Process seal/gasket</b> Integral Gasket, for flat faced flange process connections only, not for Antenna extension options 3 to 6  FKM O-ring, not available for combination of flat faced flanges with Antenna extension options 0, 1 or 2	0 1
<b>Enclosure/Cable inlet</b> Aluminum, Epoxy painted 2 x ½" NPT, Siemens LUI interface (C) 2 x M20x1.5, Siemens LUI interface (C)	2 3
<b>Communication/Output</b> PROFIBUS PA 4 ... 20 mA, HART®, startup at <3.6 mA	B C

Selection and Ordering data	Order No.
<b>SITRANS LR200, Flange Adapter/PTFE Rod Antenna Version</b>	C) 7 ML 5 4 2 3 -
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
<b>Approvals</b> General Purpose, CE <sup>2)</sup> General Purpose, CSA <sub>USC</sub> FM, for North America only <sup>3)</sup> CSA Class I and II, Div. I, Groups A, B, C, D, G, for North America only, Intrinsically Safe with suitable barrier <sup>3)</sup> FM, Class I and II, Div. I, Groups A, B, C, D, E, F, G, for North America only, Intrinsically Safe with suitable barrier <sup>3)</sup> ATEX II 1G EEx ia IIC T4, Intrinsically Safe with suitable barrier <sup>2)</sup> FM, Class I, Div. 2, Groups A, B, C, D, FCC 6.3 GHz, for North America only (no barrier required) <sup>3) 4)</sup> ATEX II 1/2 G EEx emia IIC T4 (no barrier required) <sup>2) 5) 6)</sup> ATEX II 1/2 G EEx dmia IIC T4 (no barrier required) <sup>2) 6)</sup> CSA/FM Class I, II and III, Div. 1, Groups A, B, C, D, E, F, G (no barrier required) <sup>2) 4) 6)</sup>	A B C D E F G H J
<b>Pressure rating</b> Rating per Pressure/Temperature curves in Manual 0.5 bar g (7.25 psi g) maximum	0 1
1) Available with process connection options BA, CA, DA, GB, HB, JB, BC, CC, DC, GD, HD, JD, BE, CE, DE, MA, MC, ME only 2) Includes European Radio approval (R&TTE), 5.8 GHz, C-TICK 3) Includes Radio approval FCC, 6.3 GHz 4) Available with enclosure option 2 only 5) Available with enclosure option 3 only 6) Available with communication option A and C only	
C) Subject to export regulations AL: N, ECCN: EAR99	

Selection and Ordering data	Order code
<b>Further designs</b> Please add "-Z" to Order No. and specify Order code(s).	
Inactive custom shield lengths: Enter the total length of the inactive shield in plain text description (in 1 mm increments).	Y01
Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters); specify in plain text	Y15
Test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000	C11
Inspection Certificate Type 3.1 per EN 10204	C12
Namur NE43 compliant, device preset to failsafe <3.6 mA <sup>5)</sup>	N07
<b>Operating Instructions for HART/4mA device</b>	Order No.
English	C) 7ML1998-5JP02
German	C) 7ML1998-5JP32
Note: The Operating Instructions should be ordered as a separate line item on the order.	
Multi-language Quick Start manual This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.	C) 7ML1998-5XC81

# Level Measurement

## Continuous level measurement - Radar transmitters

SITRANS LR200

### Operating Instructions for PROFIBUS PA device

English C) **7ML1998-5JR02**  
 German C) **7ML1998-5JR32**

Note: The Operating Instructions should be ordered as a separate line item on the order.

Multi-language Quick Start manual C) **7ML1998-5XD81**  
 This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.

### Accessories

Handheld programmer, Intrinsically safe, EEx ia C) **7ML1930-1BK**

HART modem/RS-232 (for use with a PC and SIMATIC PDM) D) **7MF4997-1DA**

HART modem/USB (for use with a PC and SIMATIC PDM) D) **7MF4997-1DB**

One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART<sup>1)</sup> **7ML1930-1AP**

One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA<sup>6)</sup> **7ML1930-1AQ**

Antenna, rod, PTFE **7ML1830-1HC**

Antenna extension, 50 mm (2") PTFE **7ML1830-1CG**

Antenna extension, 100 mm (4") PTFE **7ML1830-1CH**

SITRANS RD100 Remote display - see Chapter 8

SITRANS RD200 Remote display - see Chapter 8

SITRANS RD500 Remote display - see Chapter 8

<sup>1)</sup> Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.

C) Subject to export regulations AL: N, ECCN: EAR99

D) Subject to export regulations AL: N, ECCN: EAR99H

### Selection and Ordering data

Order No.

Selection and Ordering data	Order No.
<b>SITRANS LR200, Flange Adapter/Horn Antenna Version</b>	<b>7ML5425-</b>
2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).	
<b>Antenna Material (uses antenna adapter)</b>	
316L stainless steel with PTFE cone emitter	0
316L stainless steel with PTFE cone emitter and purge connection with 1/8" NPT inlet <sup>1)</sup>	1
Sliding waveguide system with 1000 mm (40") waveguide <sup>1) 2)</sup>	2
<b>Process connection (refer to Pressure/Temperature curves on specification sheets)</b>	
Flanges (316L stainless steel)	
DN 50 PN 16, Type A, flat faced <sup>1)</sup>	AA
DN 80 PN 16, Type A, flat faced	BA
DN 100 PN 16, Type A, flat faced	CA
DN 150 PN 16, Type A, flat faced	DA
DN 200 PN 16, Type A, flat faced	EA
DN 80 PN 10/16 DIN EN1092-1 form B1	BF
DN 100 PN 10/16 DIN EN1092-1 form B1	CF
DN 150 PN 10/16 DIN EN1092-1 form B1	DF
DN 200 PN 16 DIN EN1092-1 form B1	EF
2" ASME 150 lb, flat faced <sup>1)</sup>	FB
3" ASME 150 lb, flat faced	GB
4" ASME 150 lb, flat faced	HB
6" ASME 150 lb, flat faced	JB
8" ASME 150 lb, flat faced	KB
DN 50 PN 40, flat faced <sup>1)</sup>	AC
DN 80 PN 40, flat faced	BC
DN 100 PN 40, flat faced	CC
DN 80 PN 25/40 DIN EN1092-1 form B1	CG
DN 100 PN 25/40 DIN EN1092-1 form B1	DG
DN 150 PN 25/40 DIN EN1092-1 form B1	EG
2" ASME 300 lb, flat faced <sup>1)</sup>	FD
3" ASME 300 lb, flat faced	GD
4" ASME 300 lb, flat faced	HD
JIS DN 50 10K <sup>1)</sup>	AE
JIS DN 80 10K	BE
JIS DN 100 10K	CE
JIS DN 150 10K	DE
JIS DN 200 10K	EE
(Note: Flange bolting patterns and facings dimensionally correspond to the applicable ASME B16.5, or EN 1092-1, or JIS B 2220 standard.)	
<b>Communication/Output</b>	
PROFIBUS PA	1
4 ... 20 mA, HART®, startup at <3.6 mA	2
<b>Process seal/gasket</b>	
FKM (-40 ... +200 °C)	0
Nitrile (-40 ... +60 °C), sliding waveguide systems only	1
FFKM (-35 ... +200 °C)	2
<b>Enclosure/Cable inlet</b>	
Aluminum, Epoxy painted	
2 x 1/2" NPT, Siemens LUI interface	2
2 x M20x1.5, Siemens LUI interface	3
<b>Horn size/Waveguide options</b>	
80 mm (3") horn <sup>3)</sup>	B
100 mm (4") horn <sup>3)</sup>	C
150 (6") mm horn	D
200 (8") mm horn	E
100 mm (4") horn with 100 mm (4") waveguide extension <sup>3)</sup>	F
100 mm (4") horn with 150 mm (6") waveguide extension <sup>3)</sup>	G
100 mm (4") horn with 200 mm (8") waveguide extension <sup>3)</sup>	H
100 mm (4") horn with 250 mm (10") waveguide extension <sup>3)</sup>	J



# Level Measurement

## Continuous level measurement - Radar transmitters

### SITRANS LR200

#### Selection and Ordering data

Order No.

#### SITRANS LR200, Flange Adapter/Horn Antenna Version

7ML5425-

2-wire, 6 GHz pulse radar level transmitter for continuous monitoring of liquids and slurries in storage and process vessels including high temperature and pressure, to a range of 20 m (66 ft).

150 mm (6") horn with 100 mm (4") waveguide extension  
150 mm (6") horn with 150 mm (6") waveguide extension  
150 mm (6") horn with 200 mm (8") waveguide extension

150 mm (6") horn with 250 mm (10") waveguide extension  
200 mm (8") horn with 100 mm (4") waveguide extension  
200 mm (8") horn with 150 mm (6") waveguide extension

200 mm (8") horn with 200 mm (8") waveguide extension  
200 mm (8") horn with 250 mm (10") waveguide extension

Waveguide only - Waveguide length 500 mm ... 3000 mm (in 1 mm increments)  
(Add order code Y01 and plain text: "waveguide length ... mm")

#### Approvals

General Purpose, CE<sup>4)</sup>

General Purpose, CSA<sub>USC</sub>, FM, for North America only<sup>5)</sup>

CSA Class I and II, Div. I, Groups A, B, C, D, G, for North America only, Intrinsically Safe with suitable barrier<sup>5)</sup>

FM, Class I and II, Div. I, Groups A, B, C, D, E, F, G, for North America only, Intrinsically Safe with suitable barrier<sup>5)</sup>

ATEX II 1G EEx ia IIC T4, Intrinsically Safe with suitable barrier<sup>4)</sup>

FM, Class I, Div. 2, Groups A, B, C, D, for North America only (no barrier required)<sup>5) 6)</sup>

ATEX II 1/2 G EEx emia IIC T4 (no barrier required)<sup>4) 7) 8)</sup>

ATEX II 1/2 G EEx dmia IIC T4 (no barrier required)<sup>4) 8)</sup>

CSA/FM Class I, II and III, Div. 1, Groups A, B, C, D, E, F, G (no barrier required)<sup>5) 6) b)</sup>

#### Pressure rating

Rating per Pressure/Temperature curves in Manual 0.5 bar g (7.25 psi g) maximum

1) Available with pressure rating option 1 only

2) Maximum Process Temperature +60 °C (+140 °F)

3) For stillpipe applications only

4) Includes European Radio approval (R&TTE), 5.8 GHz, C-TICK

5) Includes Radio approval FCC, 6.3 GHz

6) Available with enclosure option 2 only

7) Available with enclosure option 3 only

8) Available with communication option 0 and 2 only

C) Subject to export regulations AL: N, ECCN: EAR99

D) Subject to export regulations AL: N, ECCN: EAR99H

#### Selection and Ordering data

Order code

#### Further designs

Please add **"-Z"** to Order No. and specify Order code(s).

Inactive custom shield lengths: Enter the total length of the inactive shield in plain text description (in 1 mm increments).

Y01

Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters); specify in plain text

Y15

Test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and to ISO 9000

C11

Inspection Certificate Type 3.1 per EN 10204

C12

Namur NE43 compliant, device preset to failsafe <3.6 mA<sup>1)</sup>

N07

#### Operating Instructions for HART/mA device

Order No.

English

C) 7ML1998-5JP02

German

C) 7ML1998-5JP32

Note: The Operating Instructions should be ordered as a separate line item on the order.

Multi-language Quick Start manual

This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.

C) 7ML1998-5XC81

#### Operating Instructions for PROFIBUS PA device

English

C) 7ML1998-5JR02

German

C) 7ML1998-5JR32

Note: The Operating Instructions should be ordered as a separate line item on the order.

Multi-language Quick Start manual

This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.

C) 7ML1998-5XD81

#### Accessories

Handheld programmer, Intrinsically safe, EEx ia

C) 7ML1930-1BK

HART modem/RS-232 (for use with a PC and SIMATIC PDM)

D) 7MF4997-1DA

HART modem/USB (for use with a PC and SIMATIC PDM)

D) 7MF4997-1DB

One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART<sup>2)</sup>

7ML1930-1AP

One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA<sup>3)</sup>

7ML1930-1AQ

SITRANS RD100 Remote display - see Chapter 8

SITRANS RD200 Remote display - see Chapter 8

SITRANS RD500 Remote display - see Chapter 8

1) Includes Radio approval FCC, 6.3 GHz

2) Product shipped with plastic cable gland, rated to -20 °C. If -40 °C rating required, then metallic cable gland is recommended.

3) Available with enclosure option 2 only

C) Subject to export regulations AL: N, ECCN: EAR99


D) Subject to export regulations AL: N, ECCN: EAR99H

# Level Measurement

## Continuous level measurement - Radar transmitters

SITRANS LR200

### Characteristic curves

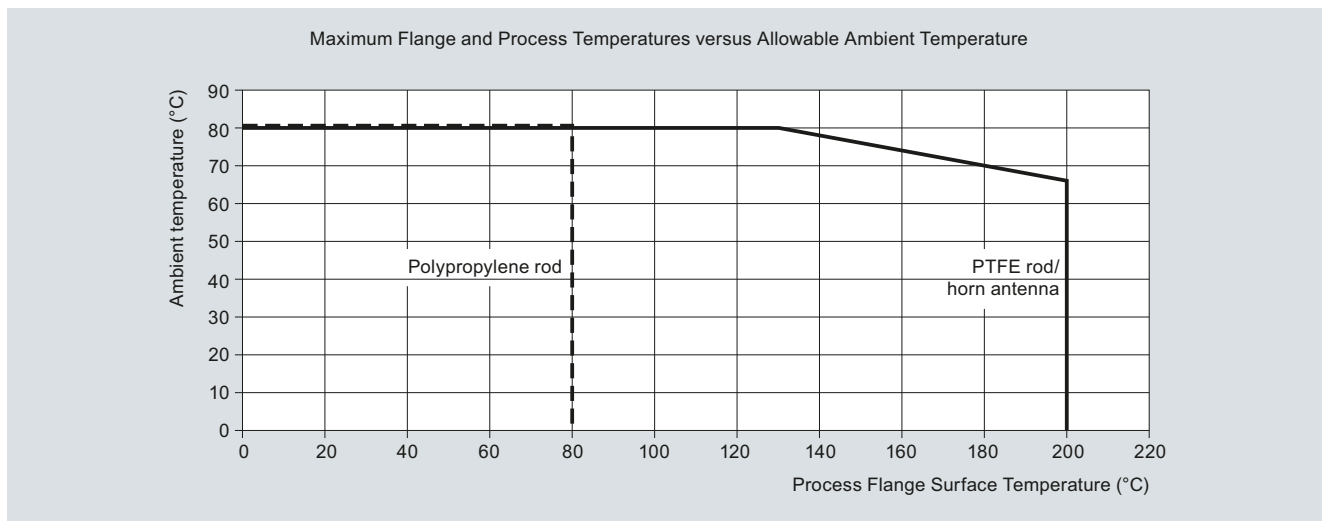

SITRANS LR200 Ambient/Process Flange Surface Temperature Curve



# Level Measurement


## Continuous level measurement - Radar transmitters

### SITRANS LR200


#### Dimensional drawings

5


**SITRANS LR200 with Polypropylene Shielded Rod Antenna**

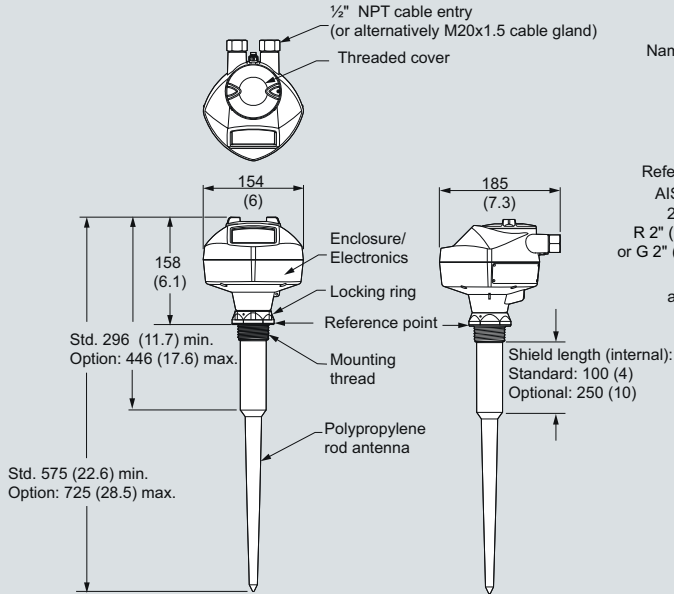


**PTFE Rod Antenna, Threaded**

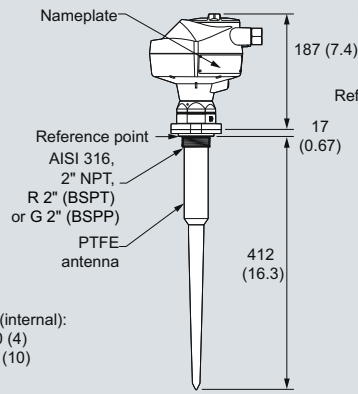


**Threaded Connection PTFE Rod, external shield**

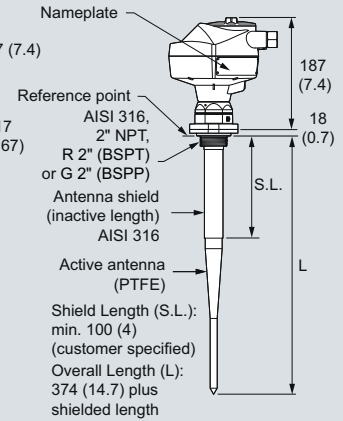


**Horn Antenna with Flat Faced Flange**

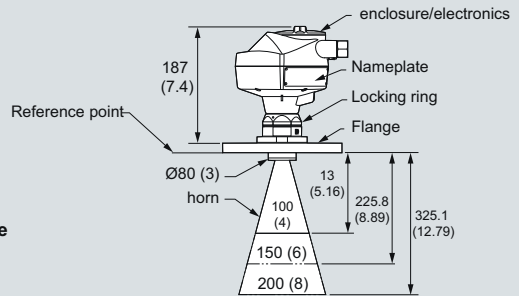


**Waveguide Antenna with Flat Faced Flange**

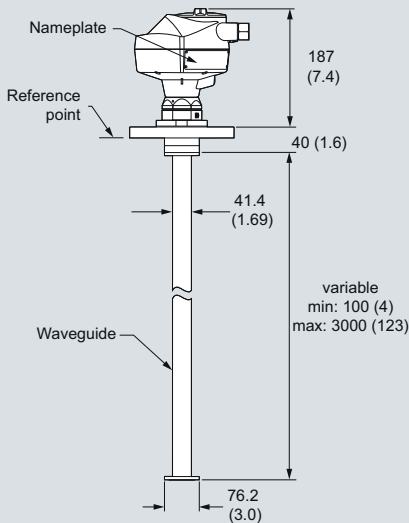

**Sliding Waveguide**

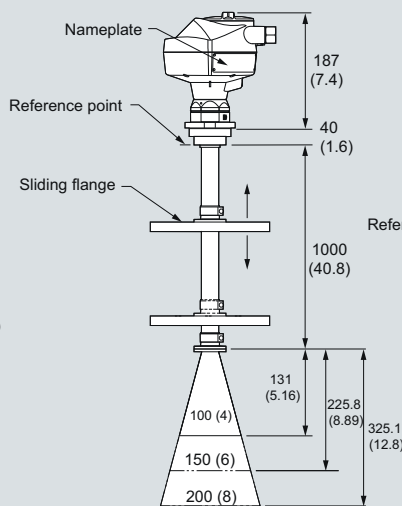

**Sanitary Rod Antenna**

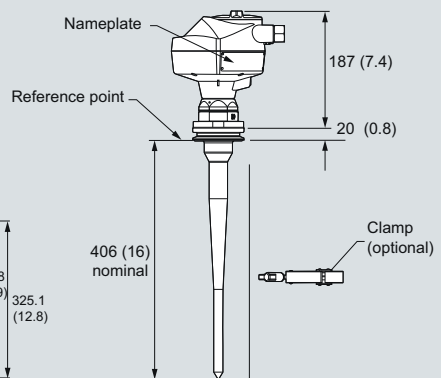


SITRANS LR200, dimensions in mm (inch)

# Level Measurement

## Continuous level measurement - Radar transmitters

SITRANS LR200

### Schematics

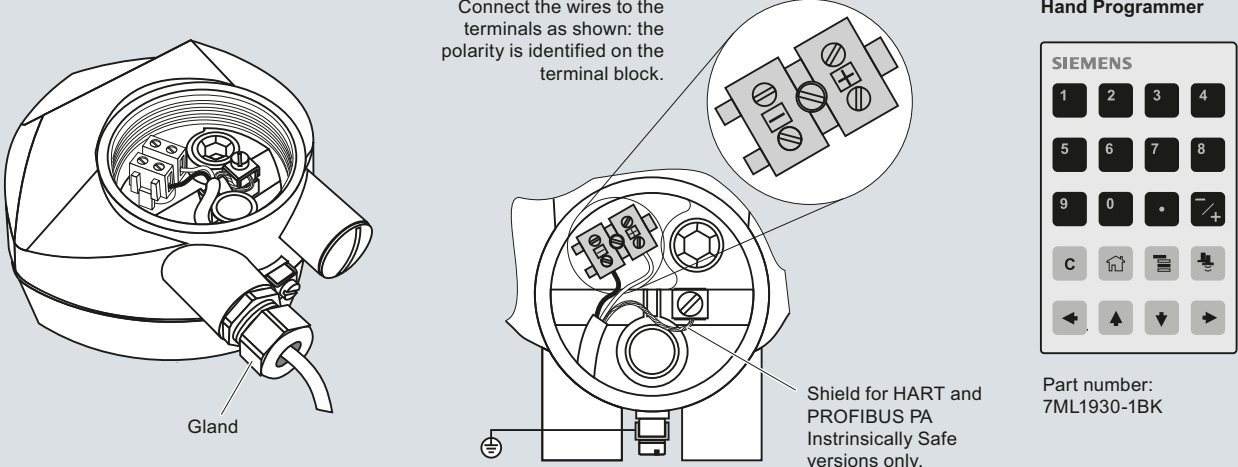

Connect the wires to the terminals as shown: the polarity is identified on the terminal block.

Gland

Shield for HART and PROFIBUS PA Intrinsically Safe versions only.

**Hand Programmer**

SIEMENS			
1	2	3	4
5	6	7	8
9	0	.	/+
C	⏪	⏩	⏴
←	↑	↓	→

Part number:  
7ML1930-1BK

**Note:**

1. DC terminal shall be supplied from an SELV source in accordance with IEC 1010-1 Annex H.
2. All field wiring must have insulation suitable for rated input voltages.
3. Use shielded twisted pair cable (14 to 22 AWG) for HART version.
4. Separate cables and conduit may be required to conform to standard instrumentation wiring practices or electrical codes.

SITRANS LR200 connections

# Level Measurement

## Continuous level measurement - Radar transmitters

### SITRANS LR200 Antennas

#### Integration



Antenna configurations for SITRANS LR200

#### Technical specifications

Antenna Types	Flat Faced Flange with Rod	Shielded Rod	Sanitary Rod (1 piece construction)	Horn (4", 6", 8" sizes available)	Waveguide
<b>Connection type</b>	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6")	Threaded 2" NPT, R 2" (BSPT), G 2" (BSPP) or flat faced flange nominal pipe sizes 80, 100 mm (3, 4")	Sanitary fitting clamp 50, 80, 100 mm (2, 3, 4") sizes	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6")	Flat faced flange nominal pipe sizes 50, 80, 100, 150 mm (2, 3, 4, 6")
<b>Wetted parts</b>	PTFE	PTFE, 316L stainless steel, FKM o-ring	UHME-PE or PTFE	316L stainless steel PTFE, FKM o-ring	316L stainless steel PTFE, FKM o-ring
<b>Extensions</b>	50 or 100 mm (2 or 4") PTFE or UHMW-PE	100, 150, 200 or 250 mm (4, 6, 8 or 10") standard shield length	N/A	use waveguide for extensions to 6 m (20 ft) long	two sections (max.) can be connected together Max. overall length: 3 m (9.8 ft)
<b>Dielectric constant</b>	> 3	> 3	> 3	> 3	> 1.6
<b>Insertion length (max.)</b>	41 cm (16.3")	variable	41 cm (16.3")	variable with extension	variable
<b>Purging option (liquid or gas)</b>	No	No	No	Yes	Yes
<b>Sliding waveguide option for digesters<sup>1)</sup></b>	Yes	No	No	Yes	N/A
<b>Weight<sup>2)</sup></b>	6.5 kg (14.3 lbs)	5.0 kg (11 lbs)	5.0 kg (11 lbs)	7.5 kg (16.5 lbs)	8.0 kg (17.6 lbs) 1 m (39") length

<sup>1)</sup> Maximum pressure 0.5 bar g at +60 °C (7.25 psi g at +140 °F)


<sup>2)</sup> Not including extensions, includes SITRANS LR200 and smallest process connection

# Level Measurement



## Continuous level measurement - Radar transmitters

### SITRANS LR200 Specials

#### SITRANS LR200 Specials

	Order No.
<b>SITRANS LR200 Aluminum Enclosure Kit with Electronics and Covers (7ML5422, 7ML5423, 7ML5424, 7ML5425), calibrated for use with standard rod antenna</b>	
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with HART <sup>®</sup> communication, no process connection. <sup>7)</sup>	C) <b>A5E01483323</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with HART <sup>®</sup> communication, no process connection. <sup>7)</sup>	C) <b>A5E01483368</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, M20 cable inlet, approval option C, with HART <sup>®</sup> communication, no process connection. <sup>7)</sup>	C) <b>A5E01483389</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with PROFIBUS PA communication, no process connection. <sup>7)</sup>	C) <b>A5E01483420</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with PROFIBUS PA communication, no process connection. <sup>7)</sup>	C) <b>A5E01483440</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, M20 cable inlet, approval option C, with PROFIBUS PA communication, no process connection. <sup>7)</sup>	C) <b>A5E01483456</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option A, with HART <sup>®</sup> communication, no process connection. <sup>7)</sup>	C) <b>A5E01483468</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option C, with HART <sup>®</sup> communication, no process connection. <sup>7)</sup>	C) <b>A5E01483480</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option E, with HART <sup>®</sup> communication, no process connection. <sup>7)</sup>	C) <b>A5E01483493</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option E, with HART <sup>®</sup> communication, no process connection. <sup>7)</sup>	C) <b>A5E01483536</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 6.3 GHz, NPT cable inlet, approval option C, with PROFIBUS PA communication, no process connection. <sup>7)</sup>	C) <b>A5E01483547</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, NPT cable inlet, approval option E, with PROFIBUS PA communication, no process connection. <sup>7)</sup>	C) <b>A5E01483559</b>







#### SITRANS LR200 Specials

	Order No.
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option A, with HART <sup>®</sup> communication start-up at <3.6mA, no process connection. <sup>7)</sup>	C) <b>A5E02956419</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option E, with HART <sup>®</sup> communication start-up at <3.6mA, no process connection. <sup>7)</sup>	C) <b>A5E02956420</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option G, with HART <sup>®</sup> communication start-up at <3.6mA, no process connection. <sup>7)</sup>	C) <b>A5E02956421</b>
SITRANS LR200 aluminum enclosure with board stack, LUI display, 5.8 GHz, M20 cable inlet, approval option H, with HART <sup>®</sup> communication start-up at <3.6mA, no process connection. <sup>7)</sup>	C) <b>A5E02956422</b>
<b>SITRANS LR200 Horn Antenna Kits with mounting screws (no emitter supplied)</b>	
80 mm (3") horn antenna kit	<b>PBD-25500K02A</b>
100 mm (4") horn antenna kit	<b>PBD-25500K03A</b>
150 mm (6") horn antenna kit	<b>PBD-25500K05A</b>
200 mm (8") horn antenna kit	<b>PBD-25500K07A</b>
<b>SITRANS LR200 Extension Kits for Horn Antenna with mounting screws</b>	
100 mm (4") extension kit for horn antenna	<b>PBD-25501K0100A</b>
150 mm (6") extension kit for horn antenna	<b>PBD-25501K0150A</b>
200 mm (8") extension kit for horn antenna	<b>PBD-25501K0200A</b>
250 mm (10") extension kit for horn antenna	<b>PBD-25501K0250A</b>
500 mm (20") extension kit for horn antenna	<b>PBD-25501K0500A</b>
1000 mm (40") extension kit for horn antenna	<b>PBD-25501K1000A</b>
<b>SITRANS LR200 Flanged Rod Antenna Kit with 316L SS flat faced flanges</b>	
Flanged PTFE rod antenna kit, 2" ASME, 150 lb. See drawing 51003 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>1) 6)</sup>	<b>PBD-51003K020AAAA</b>
Flanged PTFE rod antenna kit, DN 50 PN16. See drawing 51003 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>1) 6)</sup>	<b>PBD-51003K050AJAA</b>
Flanged PTFE rod antenna kit, JIS 10K DN 50. See drawing 51003 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>1) 6)</sup>	<b>PBD-51003K050AOAA</b>

# Level Measurement

## Continuous level measurement - Radar transmitters

### SITRANS LR200 Specials

	Order No.		Order No.
<b>SITRANS LR200 PTFE Rod Antenna Kit with 316L SS 1½" pipe thread process connection</b>		<b>SITRANS LR200 Horn Antenna Kit with 316L SS flat faced flange, with PTFE emitter (without waveguide)</b>	
PTFE rod antenna kit, 1½" NPT 316L SS Process Connection, FKM O-ring; See drawing 51004 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>6)</sup>	<b>PBD-51004K1AAA</b>	Horn antenna kit, 2" ASME 316L SS flange 3" horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K020AAAA</b>
PTFE rod antenna kit, R 1½" (BSPT), EN 10226 316L SS Process Connection, FKM O-ring; See drawing 51004 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>6)</sup>	<b>PBD-51004K2AAA</b>	Horn antenna kit, 2" ASME 316L SS flange 4" horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K020AABA</b>
PTFE rod antenna kit, 1½" G 316L SS Process Connection, FKM O-ring; See drawing 51004 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>6)</sup>	<b>PBD-51004K3AAA</b>	Horn antenna kit, 2" ASME 316L SS flange 6" horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K020AACA</b>
<b>SITRANS LR200 PTFE Rod Antenna Kit with 316L SS 2" pipe thread process connection</b>		Horn antenna kit, 2" ASME 316L SS flange 8" horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K020AADA</b>
PTFE rod antenna kit, 2" NPT 316L SS Process Connection, FKM O-ring; See drawing 51005 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>6)</sup>	<b>PBD-51005K1AAA</b>	Horn antenna kit, DN 50 PN 16 316L SS flange 80 mm horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K050AJAA</b>
PTFE rod antenna kit, R 2" (BSPT), EN 10226 316L SS Process Connection, FKM O-ring; See drawing 51005 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>6)</sup>	<b>PBD-51005K2AAA</b>	Horn antenna kit, DN 50 PN 16 316L SS flange 100 mm horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K050AJBA</b>
PTFE rod antenna kit, 2" G 316L SS Process Connection, FKM O-ring; See drawing 51005 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>6)</sup>	<b>PBD-51005K3AAA</b>	Horn antenna kit, DN 50 PN 16 316L SS flange 150 mm horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K050AJCA</b>
<b>SITRANS LR200 PTFE Rod Antenna Kit (100 mm shield) with 316L SS 2" pipe thread process connection</b>		Horn antenna kit, DN 50 PN 16 316L SS flange 200 mm horn, PTFE emitter <sup>2) 6)</sup>	<b>PBD-51006K050AJDA</b>
PTFE rod antenna kit, 2" NPT 316L SS Process Connection, FKM O-ring; See drawing 51002 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>3) 6)</sup>	<b>PBD-51002K0100AAA</b>	<b>SITRANS LR200 Sanitary Rod Antenna with Sanitary Fitting Clamp Flange mounting and bushing. See drawing 51010 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> (Sanitary Fitting Clamps not included)</b>	
PTFE rod antenna shielded kit, R 2" (BSPT), EN 10226 316L SS Process Connection, FKM O-ring, 100 mm 316L SS shield. See drawing 51002 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>3) 6)</sup>	<b>PBD-51002K0100BAA</b>	PTFE sanitary rod antenna kit, 2" mounting connection. <sup>6)</sup>	<b>PBD-51010K1AA</b>
PTFE rod antenna shielded kit, 2" G 316L SS Process Connection, FKM O-ring, 100 mm 316L SS shield. See drawing 51002 on <a href="http://www.siemens.com/radar">http://www.siemens.com/radar</a> <sup>3) 6)</sup>	<b>PBD-51002K0100CAA</b>	PTFE sanitary rod antenna kit, 3" mounting connection. <sup>6)</sup>	<b>PBD-51010K2AA</b>
<b>SITRANS LR200 PTFE Flanged Rod Antenna Kit with 316L SS shield and 316L SS flat faced flange</b>		PTFE sanitary rod antenna kit, 4" mounting connection. <sup>6)</sup>	<b>PBD-51010K3AA</b>
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L SS flange, 100 mm 316L SS shield. <sup>1) 6)</sup>		UHMW-PE sanitary rod antenna kit, 2" mounting connection. <sup>6)</sup>	<b>PBD-51010K1AB</b>
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L SS flange, 100 mm 316L SS shield. <sup>1) 6)</sup>		UHMW-PE sanitary rod antenna kit, 3" mounting connection. <sup>6)</sup>	<b>PBD-51010K2AB</b>
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L SS flange, 150 mm 316L SS shield. <sup>1) 6)</sup>		UHMW-PE sanitary rod antenna kit, 4" mounting connection. <sup>6)</sup>	<b>PBD-51010K3AB</b>

# Level Measurement

## Continuous level measurement - Radar transmitters

SITRANS LR200 Specials

	Order No.
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L SS flange, 150 mm 316L SS shield. <sup>1) 6)</sup>	<b>PBD-51014K0150EJA</b>
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L SS flange, 200 mm 316L SS shield. <sup>1) 6)</sup>	<b>PBD-51014K0200AAA</b>
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L SS flange, 200 mm 316L SS shield. <sup>1) 6)</sup>	<b>PBD-51014K0200EJA</b>
PTFE shielded rod antenna kit, flanged, 3" ASME 150 lb 316L SS flange, 250 mm 316L SS shield. <sup>1) 6)</sup>	<b>PBD-51014K0250AAA</b>
PTFE shielded rod antenna kit, flanged, DN 80 PN 16 316L SS flange, 250 mm 316L SS shield. <sup>1) 6)</sup>	<b>PBD-51014K0250EJA</b>
<b>PTFE paste</b>	
Kit, PTFE paste, Tube, 250 mL. <sup>7)</sup>	C) <b>PBD-51036065</b>
<b>Cable gland</b>	
One polymeric cable gland M20x1.5, rated -20 ... +80 °C (-4 ... +176 °F) for General Purpose and ATEX EEx e	<b>7ML1930-1AN</b>
One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), HART®	<b>7ML1930-1AP</b>
One metallic cable gland M20x1.5, rated -40 ... +80 °C (-40 ... +176 °F), PROFIBUS PA	<b>7ML1930-1AQ</b>

C) Subject to export regulations AL: N, ECCN: EAR99

Please contact [nacc.smpi@siemens.com](mailto:nacc.smpi@siemens.com) for special requests.

- 1) Available in flange sizes including ASME, DIN and JIS: please contact [nacc.smpi@siemens.com](mailto:nacc.smpi@siemens.com).
- 2) Available with no pressure rating
- 3) Available in other shield lengths: please contact [nacc.smpi@siemens.com](mailto:nacc.smpi@siemens.com).
- 4) Available with no pressure rating and with General Purpose Approvals only
- 5) Please contact [nacc.smpi@siemens.com](mailto:nacc.smpi@siemens.com) for pricing and part number. Submit completed Application Questionnaire found on page 5/195
- 6) Available with Pressure rating; serial number of original unit required with completed Application Questionnaire found on page 5/195
- 7) Subject to export regulations AL: N, ECCN: EAR99




# Level Measurement


## Continuous level measurement - Radar transmitters

### SITRANS LR200


#### Characteristic curves

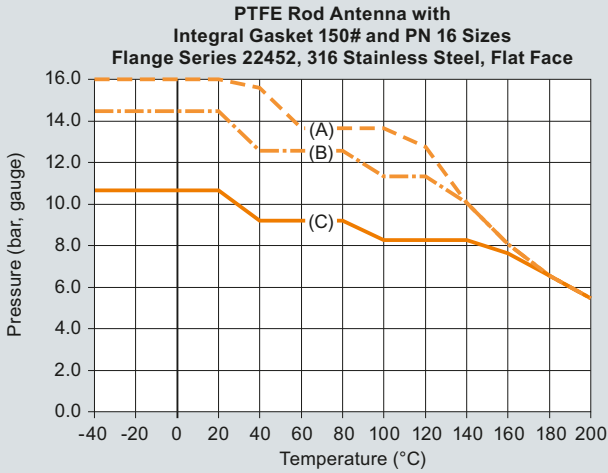

- (A) 22452 50 mm/2" nom.
- .- (B) 22452 80 mm/3" nom.
- (C) 22452 100 mm/4" nom.

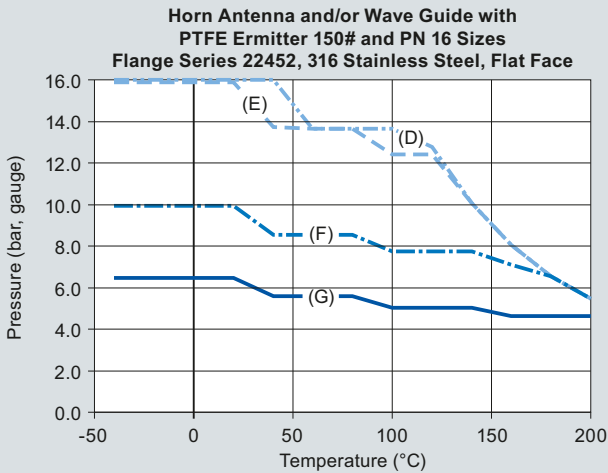

- .- (D) 22452 80 mm/3" nom.
- (E) 22452 100 mm/4" nom.
- .- (F) 22452 150 mm/6" nom.
- (G) 22452 200 mm/8" nom.

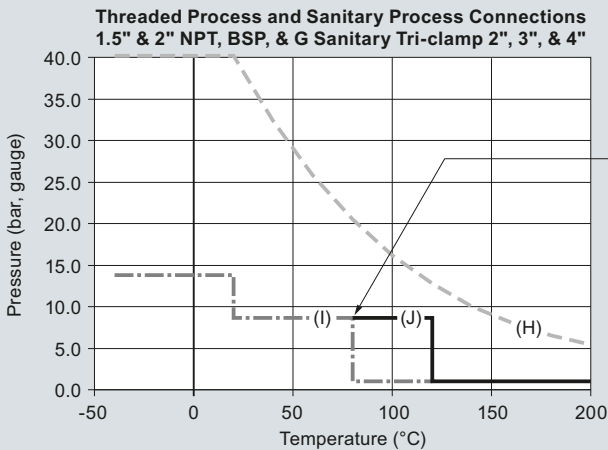

UHMW-PE is limited to 80 °C, it can be used to 120 °C for short (3 hrs) durations at ambient pressure, no stress applied to the antenna.

- (H) 1.5" and 2", Thread connection
- .- (I) UHMW-PE, Sanitary antenna
- (J) PTFE, Sanitary antenna

SITRANS LR200 Process Pressure/Temperature derating curves

5