


FINE CONTROLS (UK) LTD

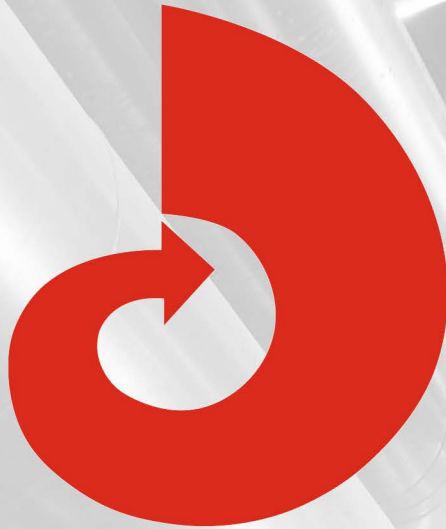

Fine Controls have been supplying process controls & instrumentation equipment since 1994, & now serves an ever expanding customer base, both in the UK & globally.

We offer a full range of valve & instrumentation products & services, with our product range representing leading technologies & brands:

Flow: Flow Meters & Transmitters, Flow Switches, Flow Control Valves & Batch Control Systems

Temperature: Temperature Probes & Thermowells, Temperature Transmitters, Temperature Regulators & Temperature Displays

Level: Level Transmitters & Switches

Pressure: Pressure Gauges & Transmitters, Precision & High Pressure Regulators & I-P Converters, Volume boosters.

Precision Pneumatics: Pressure Regulators, I-P Converters, Volume Boosters, Vacuum Regulators

Valves: Solenoid & Pneumatic Valves, Control Valves & Positioners, Actuated Ball, Globe or Diaphragm Valves & Isolation Valves

Services: Repair, Calibration, Panel Build, System Design & Commissioning

A **rotork** Brand
FAIRCHILD



bürkert



SIEMENS



alcon
SOLENOID VALVES

A **rotork** Brand



MIDLAND-ACS
A **rotork** Brand



Honeywell



Bourdon
Baumer Group



SOLDO
CONTROLS
A **rotork** Brand



Fine Controls (UK) LTD, Bassendale Road, Croft Business Park,
Bromborough, Wirral, CH62 3QL UK
Tel: 0151 343 9966
Email: sales@finecontrols.com

GENERAL PURPOSE INDUSTRIAL THERMOMETER

SPP2 Series Temperature Sensor / Thermometer Assembly with adjustable immersion length.

- DM640P Battery Powered Temperature Display
- Temperature Probe 100 or 150mm Immersion
- 6mm Probe Stem Diameter
- Optional Compression Gland
- Temperature Range -50/200 Deg C at tip

INTRODUCTION



The SPP2 series temperature sensor and thermometer assembly is a general purpose product designed for use in the process industry. It consists of a class B Pt100 temperature sensor housed in a 316 Stainless Steel probe. It has a 6mm diameter stem with 2 choices of probe length providing a flexible immersion length with use of a compression gland.

Housed in an impact resistant ABS plastic connection head, the battery powered DM640P measures the sensor and displays the measured temperature in Deg C or F.

SPECIFICATIONS @ 20 ° C

Sensor

Element: Pt100 Class B 3 wire to IEC 60751
Probe Material: 316 Stainless Steel
Immersion Length: Max100mm, 150mm, 6mm Diameter
Process Connection: Optional Compression Gland
Head Thread: M24 x 1.5
Sensor Wires: 7/0.2 Cu PTFE

Indicator - See DM640P Datasheet for full details

Material: Impact Resistant ABS
Head Seal: IP 67
Input: Pt100
Accuracy: 0.2 °C

Output: 4 Digit LCD display 20mm

Temperature Range: (-50 to 200) °C at tip
Max Head Temperature: 70 Deg C
Accuracy Transmitter: As DM640P (see datasheet) plus class B sensor error

Order Codes

SPP2640P/100mm
SPP2640P/150mm

General

Status Instruments Ltd
Green Lane Business Park
Green Lane, Tewkesbury
Gloucestershire, UK
GL20 8DE
Tel: +44 (0)1684 296818
Fax: +44 (0)1684 293746
Email: sales@status.co.uk
Website: www.status.co.uk
D2486-01-02 SPP2_640p DATASHEET

