

FINE CONTROLS (UK) LTD



Fine Controls have been supplying process controls & instrumentation equipment since 1994, & now serves an ever expanding customer base, both in the UK & globally.

We offer a full range of valve & instrumentation products & services, with our product range representing leading technologies & brands:

Flow: Flow Meters & Transmitters, Flow Switches, Flow Control Valves & Batch Control Systems

Temperature: Temperature Probes & Thermowells, Temperature Transmitters, Temperature Regulators & Temperature Displays

Level: Level Transmitters & Switches

Pressure: Pressure Gauges & Transmitters, Precision & High Pressure Regulators & I-P Converters, Volume boosters.

Precision Pneumatics: Pressure Regulators, I-P Converters, Volume Boosters, Vacuum Regulators

Valves: Solenoid & Pneumatic Valves, Control Valves & Positioners, Actuated Ball, Globe or Diaphragm Valves & Isolation Valves

Services: Repair, Calibration, Panel Build, System Design & Commissioning

A **rotork** Brand
FAIRCHILD



bürkert



SIEMENS



alcon
SOLENOID VALVES

A **rotork** Brand



MIDLAND-ACS
A **rotork** Brand



Honeywell



Bourdon
Baumer Group



SOLDO
CONTROLS

A **rotork** Brand



Fine Controls (UK) LTD, Bassendale Road, Croft Business Park,
Bromborough, Wirral, CH62 3QL UK
Tel: 0151 343 9966
Email: sales@finecontrols.com

Valve Positioners

Series 73 Built-In Valve Positioner

Introduction

Features & Benefits

- ▶ Single-axis, force-balance principle of operation, ensures accurate and stable positioning
- ▶ Feedback circuits direct the actuator's position, ensuring adherence to the control instrument signal
- ▶ Range spring capability accommodates a wide variety of valve strokes and instrument spans

Description

The Series 73 Built-in Valve Positioners use the full force of their air supply to drive and maintain the piston or diaphragm in a pneumatic actuator to position a valve to what is required by a control instrument, regardless of the presence of forces that change valve position.

This line of compact instruments incorporates a single-axis, force-balance principle of operation to ensure accurate and stable control valve positioning. In all cases, including bottom-loading applications, a Model 73 Built-In Valve Positioner is mounted directly on the topwork of the valve, with no external levers or other exposed mechanisms.

Each positioner receives a signal from a control instrument, and using an air supply as high as 100 psig, the positioner strokes the valve actuator to the required position.

Like all valve positioners, the Model 73 Built-In Valve Positioners have feedback circuits designed to measure the position of the actuator's piston or diaphragm. The positioner then supplies or exhausts air to bring the actuator within the required range for its corresponding control instrument.

The position of the piston or diaphragm in the valve actuator is sensed by the amount of compressive force exerted by a range spring on the valve positioner's diaphragm assembly. By selecting the appropriate range spring from the wide selection available almost any combination of valve stroke (from 1/4" to 4") and instrument span (from 2 to 24 psi) can be obtained.

Specifications

Functional Specifications

Input Range

3-15, 3-9, 9-15, 6-30, 3-27 psig

Valve Travel

Minimum: 1/4"

Maximum: 4"

Supply Pressure

Minimum: 3 psi above required actuator pressure

Maximum: 100 psig



Air Consumption

(In balance condition with 20 psig supply and 9 psig dead-ended output)

- 73N_F: 0.25 scfm
- 73N_B: 0.6 scfm

Overrange Limit

150 psig to any connection

Response Level

(output sensitivity to input pressure changes)

- 73N_F: 0.1% of input span
- 73N_B: 0.25% of input span

Functional Mechanical

Materials of Construction

Aluminum, brass, stainless steel, Neoprene®, and/or Buna-N

Model Selection

Model	Type of Application
73N12F	Top-loading, direct-acting, input spans of 2 to 12 psi
73N24F	Top-loading, direct-acting, input spans over 12 to 24 psi
73N-FR	Top-loading, reverse-acting
73N-B	Bottom-loading, direct-acting, with top air-cushion loading
73N-B1	Bottom-loading actuators w/actuator range spring

Valve Positioners

Series 73 Built-In Valve Positioner


Technical data

Spring Table

Valve Stroke Inches	Instrument Input Pressure Span (PSI)								
	4	5	6	8	10	12	16	20	24
	- Item No. of Range Spring Series 12395 Series $\pm 5\%$ Stroke Range Tolerance Example: 12395-1212								
1/4	1212	1012	812	612	512	412	624	524	424
5/16	1612	1212	1012	712	612	512	824	624	524
3/8	1812	1412	1212	1012	712	612	1024	724	624
7/16	2012	1812	1412	1012	812	712	1024	824	724
1/2	2412	2012	1612	1212	1012	812	1224	1024	824
9/16	2812	2012	1812	1412	1012	1012	1424	1024	
5/8	3212	2412	2012	1612	1212	1012	1624	1224	1024
3/4	3612	2812	2412	1812	1412	1212		1464	1224
7/8	4412	3612	2812	2012	1812	1412	2024	1624	1424
1	4812	4012	3212	2412	2012	1612	2424	2024	1624
1-1/8	5612	4412	3612	2812	2012	1812		2024	
1-1/4	6412	4812	4012	3212	2412	2012	2824	2424	2024
1-1/2		6412*	4812	3612	2812	2412	4024	2824	2424
1-5/8		6412*	4812	4012	3212	2612	4024	3224	
1-3/4		6412*	5612	4412	3612	2812	4024	3224	2824
2			6412*	4812	4012	3212	4824	4024	3224
2-1/4				5612	4412	3612		4024	
2-1/2				6412*	4812	4012		4824	4024
2-3/4				6412*	4812	4412		4824	4824
3					6412*	4812			4824
3-1/2						5612			
4						6412*			

- 1) The maximum zero pressure for Model 73N12F is 9 psig when the 12395 series range spring is used.
- 2) The maximum zero pressure for Model 73N24F is 15 psig for instrument pressure spans of 16 psi or greater, and 28 psig when used for spans of 12 psi or less.
- 3) The maximum instrument pressure for Model 73N-FR is 15 psig for instrument pressure spans of 12 psi or less, and 27 psi for spans of 16 psi or greater.

Mounting Dimensions

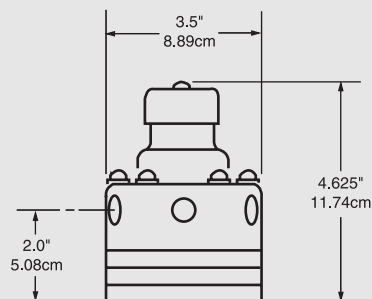

The topworks of the valve must have six, 1/4-20 x 9/16 deep (min.) blind tapped, equally spaced holes for mounting positioner

Spring Selection

1. Find the valve stroke nearest the desired valve stroke.
2. Find the instrument input pressure span nearest the desired instrument input pressure span.
3. Select the proper range spring at the intersection of the valve stroke and the instrument input pressure span columns.